

EXCEPTIONAL HYGIENE

OBJEKTA

ABC KERAMIK
BERENTELG

ABC OBJEKTA HYGINE
FLOORING

 *Quality made in Germany*

OBJEKTA HEAVY DUTY, HYGIENIC, ANTI-SLIP




SUBJECT TO CHANGE. FOR TECHNICAL REASONS THERE MAY BE COLOR VARIATIONS.



PRODUCT INFORMATION


R11
ASSESSMENT GROUP
UNGLAZED
DIN EN 14411
ANNEX AI

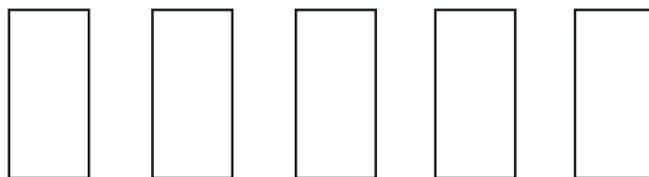

format no.	1100	1100/3	1100/5	1100/10	1120
description	tile	tile	tile	tile	on request
Format mm	240x115x10	240x115x13	240x115x15	240x115x18	240x115x20
1923 cream					
1924 beige					
1927 sand yellow					
1821 red					
1926 brown					
1925 grey					
m ² /lm per packet	0,727 m ²	0,576 m ²	0,515 m ²	0,424 m ²	0,364 m ²
piece/m ² /lm	33 pieces/m ²				
kg/m ² /lm per piece	21 kg/m ²	27 kg/m ²	31,5 kg/m ²	38 kg/m ²	42 kg/m ²
piece per packet	24	19	17	14	12
packets per pallet	72	72	72	72	72
piece per pallet	1.728	1.368	1.224	1.008	864
m ² /lm per pallet	52,344 m ²	41,472 m ²	37,08 m ²	30,528 m ²	26,208 m ²
kg per pallet	1.099 kg	1.119 kg	1.165 kg	1.161 kg	1.100 kg

Product information

Also available in R12!

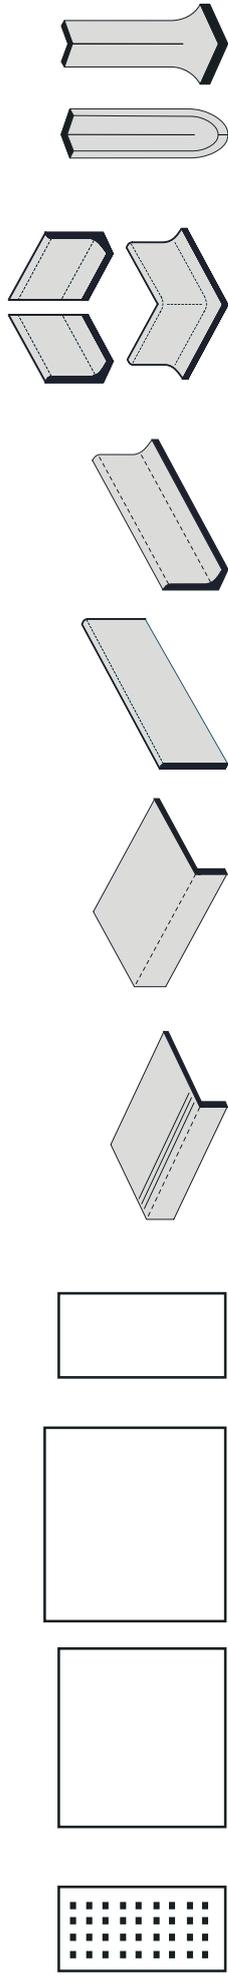

1100/3	1610	1640	1100	4823	4822	8817	4100	4003+4004	on request
Napped Profile	tile	tile	wall tile	balcony cover Profiled	balcony cover	skirting	cove base	inner and outer corner	inner and outer corner
240x115x13	240x240x12	310x310x12	240x115x10	240x115x52x12	240x115x52x12	240x75x12	240x96x10	120x96x10	
			white						
0,576 m ²	0,75 m ²	1 m ²	0,727 m ²	1,50 lm	1,50 lm	5,00 lm	4,00 lm	-	-
33 pieces/m ²	16 pieces/m ²	10 pieces/m ²	33 pieces/m ²	pieces/lm	pieces/lm	pieces/lm	pieces/lm	-	-
25 kg/m ²	26 kg/m ²	26 kg/m ²	19,5 kg/m ²	3,9 kg/lm	3,9 kg/lm	2 kg/lm	3,1 kg/lm	1 kg/pair	-
19	12	10	24	6	6	20	16	1 pair	-
72	60	42	72	90	90	96	72	-	-
1.368	720	420	1.728	540	540	1.920	1.152	-	-
41,472 m ²	45 m ²	4,20 m ²	52,344 m ²	135 lm	135 lm	480 lm	288 lm	-	-
1.037 kg	1.170 kg	1.092 kg	1.021 kg	527 kg	527 kg	960 kg	893 kg	-	-

Matching clinker straps or wall tile Piz Tasna in white available. **Other formats and thicknesses on request. All quantities per m²/lm are incl. joints.**



Classification of the designation of the displacement space to the minimum volumes.

Anti-slip floor ceramics

Classification of the total mean values of the inclination angles to the evaluation groups of the slip resistance.

mean value	assessment group
from 6° and up to 10°	R 9
more than 10° and up to 19°	R 10
more than 19° and up to 27°	R 11
more than 27° and up to 35°	R 12
more than 35°	R13

Designation of the displacement space	Minimum volume of displacement space (cm ³ /dm ²)
V 4	4
V 6	6
V 8	8
V 10	10

product features


- Made in Germany
- heavy duty
- hygienic
- acid- and alcali-resistant
- dovetail backside for perfect connection with installation material
- unglazed
- production according to DIN EN 14411
- available in 10 to 18mm thickness
- 6 colours

application areas

- food processing industry
- commercial kitchens
- industrial- and commercial buildings
- traffic buildings
- warehouses
- swimming pools
- sports facilities
- internal and external use of residential and public buildings
- etc.

surfaces

nopped profile

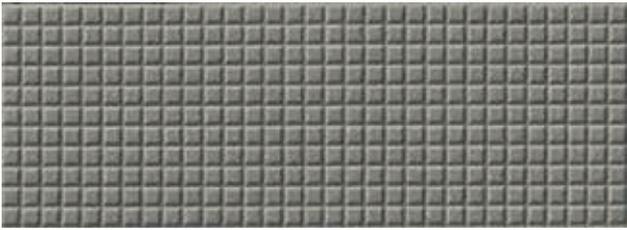

R10



R11



 Quality made in Germany



ABC-Split Tiles – the original with the dovetail backside for a high adhesive tensile strength!



Requirements for ceramic floor coverings in wet barefoot areas

The groups A, B and C are evaluated according to DIN 51097.


The required slip resistance increases from A via B to C.

Load Group	Minimum slope angle
A	12°
B	18°
C	24°

ABC-Clean

ABC unglazed tiles series OBJEKTA is available with the ABC-Clean.

The special treatment makes the tiles very easy to clean and resistant to the formation of stains. The surface treatment takes place during the firing process so this effect remains permanently in the tile and they do look as new as the first day. An impregnation of the tiles after laying is not required.

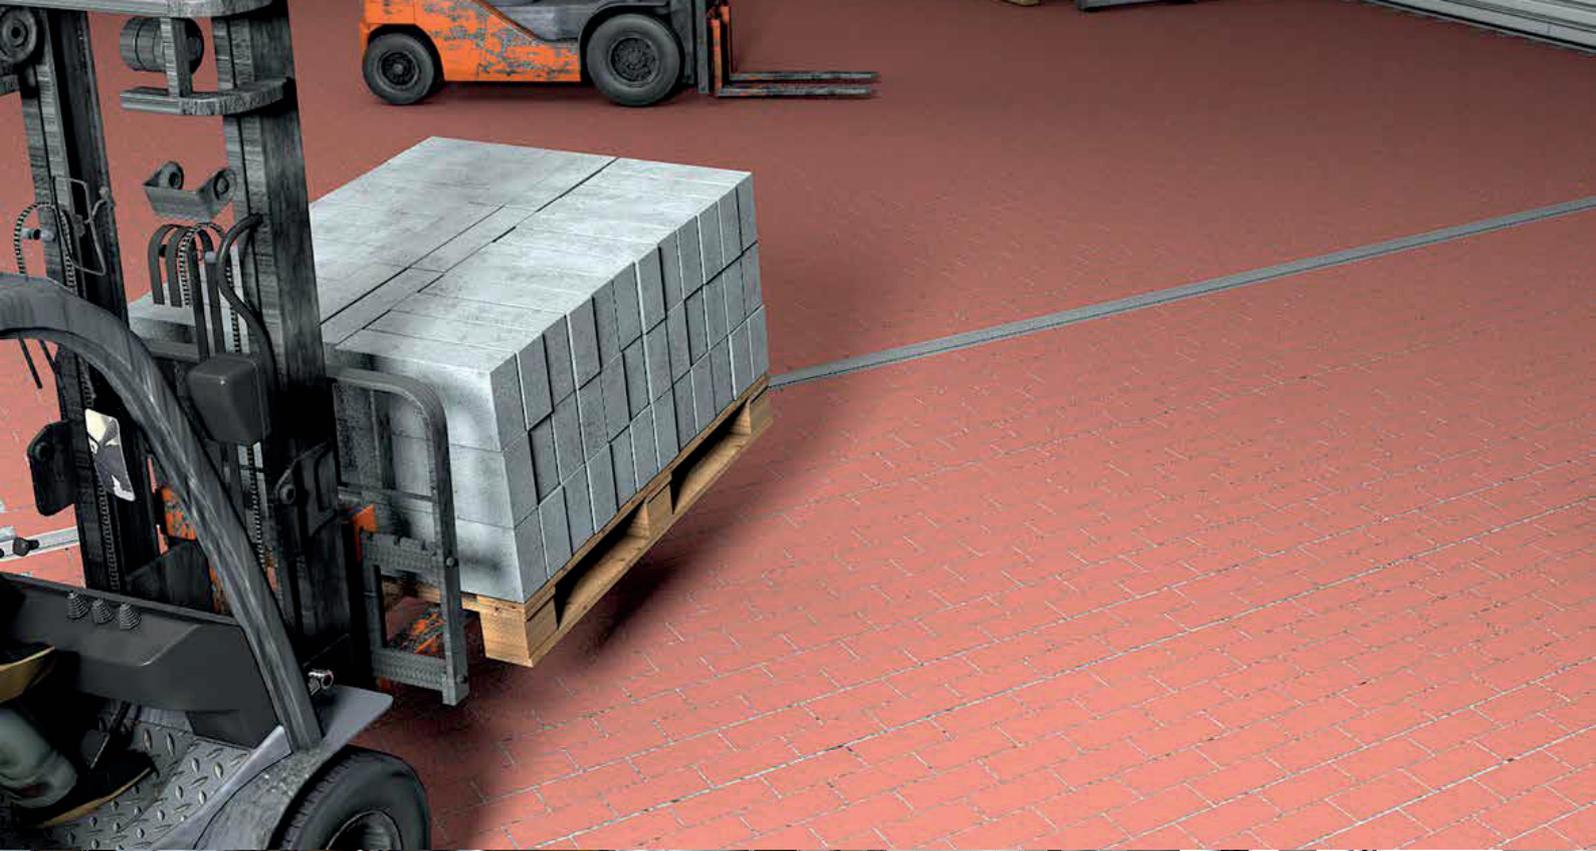

EXCEPTIONAL HYGIENE

 Saudi Arabia, P.O Box 53407,
Jeddah 21583 Al Khayat Tower,
Office No. 230

 +966 12 66 333 18
 +966 12 66 332 38
 info@exceptionalco.com

 www.exceptionalco.com